

Handles

DURALite® ColorRings™ Handle

Double End

















Single End



Our newest and most advanced ergonomic handle design! DuraLite ColorRings has the same large 3/8" (9.5 mm) diameter as our popular DuraLite Round design. The handle design has a more gradual taper from the tip to the grip so that your fingers are even more comfortable closer to the tip. In addition, we've extended the ControlRing grip by 50% to give you maximum slip-free gripping power over a larger portion of the handle. The handle has a gentle texture to reduce glare and is 100% stainless steel to make it easy to clean and sterilize by any method. The DuraLite ColorRing handle incorporates four color ring positions that are below the finger grip surface allowing you to better identify, organize and customize your instrumentation. Our innovative design makes customizing the DuraLite ColorRing handle simple and easy. With 14 Colors available...How will you color your world?

ColorRings™

ColorRings come in 14 different colors and are available in single color packages of 48-rings. Use the item codes below to select your colors.

													
RING-BL Blue	RING-TE Teal	RING-FS Fuchsia	RING-YW Yellow	RING-LG Lt Green	RING-WI White	RING-RD Red	RING-GN Green	RING-OR Orange	RING-PR Purple	RING-BR Brown	RING-BK Black	RING-GR Gray	RING-PK Pink

DURALite® Diagnostic Handle

Double End



Single End



Both of our Double and Single End DuraLite ROUND handles for Diagnostic have a large 3/8" (9.5 mm) diameter. The Single End is the lightest weight handle in the industry at only 12 grams, and the Double End is only 16 grams, and both are designed for the ultimate in tactile sensitivity. Both handles have a gentle texture to reduce glare and are 100% stainless steel to make them easy to clean and sterilize by any method.

Standard

Double End



Single End



Our original Standard diagnostic handle has a 7/32" (5.5mm) diameter with a segmented knurled grip to provide excellent control with this slimmer handle design. Both the Double End and Single End handles are 100% stainless steel and the finish is bright electro-polished to make it easy to clean and sterilize by any method.

Mirror Heads & Handles

Mirror Handles

Nordent offers four distinct Mirror Handle designs. Each is available in either Cone Socket or Simple Stem thread configurations and will accept any brand of mirror head. All are made using the finest stainless steel to provide a lifetime of trouble free service.



DURALite® ColorRings® Mirror Handle

DuraLite ColorRings Mirror Handle has a large 3/8" (9.5mm) diameter and a weight of only 24 grams. Our exclusive Control Ring™ Grip provides maximum comfort and control. With four inter-changeable color rings and 14 colors to choose from you can identify, organize and customize based on your specific needs.

Handle Selection  HM20 (CONE SOCKET)  HM22 (SIMPLE STEM)



DURALite® Round Mirror Handle

DuraLite ROUND Mirror Handle has a large 3/8" (9.5mm) diameter with a tapered body and a weight of only 15.7 grams. Our exclusive ControlRing Grip provides maximum comfort and control in this ultra light weight mirror handle.

Handle Selection  HM16 (CONE SOCKET)  HM18 (SIMPLE STEM)



DURALite® Hex Mirror Handle

DuraLite HEX Mirror Handle is often called the "Hand Form Mirror Handle". The diameter measures 25/64" (10mm) across multiple facets for maximum comfort and unlimited finger positioning. At only 25 grams, this good looking light weight handle will improve comfort and control.


Handle Selection  HM12 (CONE SOCKET)  HM14 (SIMPLE STEM)



Standard Mirror Handle

Standard Mirror Handle has a 1/4" (6.3mm) diameter and a weight of 29 grams. The knurled grip is segmented to add an extra level of control.

Handle Selection  HM10 (CONE SOCKET)  HM11 (SIMPLE STEM)




It is important to match a Cone Socket Mirror Head to a Cone Socket Mirror Handle and a Simple Stem Mirror Head to a Simple Stem Mirror Handle for a proper fit.

Cone Socket Mirror Head shanks have three graduated diameter sections. Section one is threaded, Section two is non-threaded with a larger diameter than section one, Section three follows with a shoulder that locks down on the end of the Mirror Handle. The Cone Socket shank has 48 threads per inch.

Simple Stem Mirror Head shanks have two sections. Section one is threaded, Section two is non-threaded and becomes the shank portion that attaches to the mirror face. Simple Stem shanks have 56 threads per inch.

Cone Socket or Simple Stem?

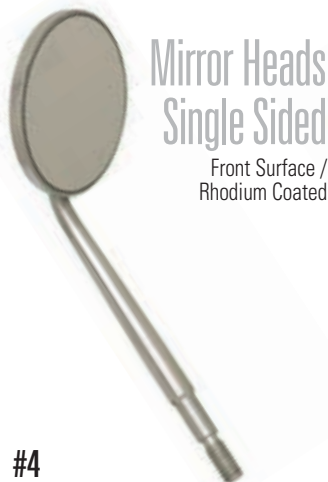

Mirror Heads Single Sided

Front Surface / Rhodium Coated

#4 Has a single reflective surface that is 22 mm (7/8") in diameter.

M4 (CONE SOCKET - shown)
M4S (SIMPLE STEM)



#5 Has a single reflective surface that is 24 mm (15/16") in diameter.

M5 (CONE SOCKET - shown)
M5S (SIMPLE STEM)



Mirror Head Double Sided

Front Surface / Rhodium Coated

#4DS Has two reflective surfaces that are 22 mm (7/8") in diameter.

4DS (CONE SOCKET - shown)



#5DS Has two reflective surfaces that are 24 mm (15/16") in diameter.

5DS (CONE SOCKET - shown)